

Sound Plus® Infrared Receiver, Model WIR RX16

Description:


The WIR RX16 is an under-the-chin style infrared receiver suitable for mild to moderate hearing loss. It features high-quality, low-distortion sound and angled ear couplings for maximum comfort and performance. The On/Off switch is built into the “arms” of the receiver, so it can never be left on to drain the batteries. Each RX16 receiver includes a BAT AP97A NiMH rechargeable battery. Use the RX16 receiver with any 2.3/stereo/2.8 MHz infrared listening system.

Applications:

- Simultaneous Interpretation • Audio Description • Media Rooms • Conferences
- Boardrooms • Courtrooms • Schools • Universities • Cinemas • Churches

WIR RX16 Receiver:

Weight:	2.1 oz (60 g) with batteries
Material and Color:	ABS plastic, Black and Grey
Battery Type, Life:	BAT AP97A NiMH Battery Pack, 6 hours
Modulation Frequency:	2.3 MHz or 2.8 MHz or stereo
Frequency Response:	200 Hz to 8 kHz, ± 5 dB
Signal to Noise Ratio:	58 dB at 10 m
Controls:	Volume control thumbwheel 3-position selection switch (2.3 MHz, 2.8 MHz, stereo)
Acoustic Output:	112 dB MAX SSPL90 with 2 cc coupler
Compatibility:	Compatible with 2.3 MHz and 2.8 MHz IR transmitters, WIR TX900 and WIR TX925 systems
Power Switch:	Built into receiver “arms”
Ear pads:	Uses EAR 031 foam cushions
Warranty:	5 years (90 days on battery)

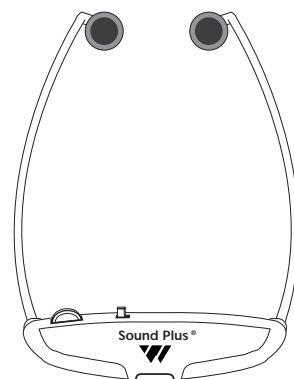

RX16 Front View

Bid Specs:

The receiver shall be a stetho type with an IR detector lens on the face of the unit. The receiver shall have a rotary-type volume control and the power switch shall be built into the “arms,” so that the unit will automatically shut off when not in use. The receiver shall operate for 6 hours per charge with one BAT AP97A NiMH battery. The receiver shall be housed in a grey and black ABS plastic case. The receiver shall have a 3-position switch to receive 2.3 MHz, 2.8 MHz or stereo modulated IR signals. The receiver shall provide 112 dB SSPL90 output. The system electrical frequency response shall be 200 Hz to 8 kHz, and the signal to noise ratio shall be 58 dB at 10 m. The receiver shall be covered by a five-year parts and labor warranty, 90 days on the battery. The receiver shall be the Williams Sound Corp. model WIR RX16.

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

Sound Plus[®] Infrared Receiver, Model WIR RX16

Contact:

United States and Mexico

Williams Sound Corp.
10321 W. 70th Street
Eden Prairie, MN 55344
Ph: 800-328-6190 / 952-943-2252 / FAX: 952-943-2174
Web: www.williamssound.com
Email: info@williamssound.com

Canada

Thorvin Electronics
2861 Sherwood Heights Dr. Units 36-37
Oakville, ON L6J-7K1 Canada
Ph: 800-323-6634 / 905-829-3040 / FAX: 905-829-4196
Web: www.thorvinelectronics.com

South America

DPTech
SIA Trecho 3/4 Lote 335 2°. Andar
71200-030 Brasília, DF
BRAZIL
Ph: (5561) 361-1384
Fax: (5561) 361-0948
Web: www.dpotech.com.br
Email: ws@dpotech.com.br

Europe and Asia

International Sales Department
Williams Sound Corp.
10321 W. 70th Street
Eden Prairie, MN 55344 USA
Phone: +1 651 493 2578 or +1 952 943 2252
Fax: +1 952 943 2174
Email: doreni@williamssound.com
Web: www.williamssound.com