

POCKETALKER® ULTRA Personal Amplifier, Model PKT D1

Description:

The Pocketalker® Ultra amplifies sound clearly and easily for better understanding. 100 hours of battery life ensures long-lasting performance. Each Pocketalker® Ultra includes a plug-in sensitive microphone; and for the TV listener: a TV listening extension cord. Use the Pocketalker® Ultra with a variety of available earphones and headphones of your choice, or, a neckloop and a telecoil-equipped hearing aid. With the optional Telelink adapter, listeners can use the Pocketalker® Ultra to amplify telephone calls to a comfortable listening level.

Applications:

- 1-on-1 Conversations, TV Listening, Listening in the Car, Small Groups and much more

PKT D1 Amplifier

Dimensions:	3.38" L x 2.23" W x .88" THK. (85.8mm x 56.6mm x 22.3 mm) (Not including belt clip or microphone assembly)
Weight:	2.5 oz. (70.9 grams) (with batteries and microphone)
Color/material:	Silver gray, ABS/Polycarbonate molded plastic case.
Battery Type:	Two 1.5V (AAA size) alkaline
Battery Life:	100 hours (typical usage) Low Battery Indicator: red light on top panel flashes.
Microphone:	Omnidirectional, electret microphone assembled in housing with foam wind screen and 3.5mm mono plug.
Tone Control:	External rotary control knob to allow user to optimize hearing.
Volume Control:	External rotary control knob with power ON-OFF switch.
Microphone Jack:	3.5 mm, mono, gold plated mini plug.
Headphone Jack:	3.5 mm, mono, nickel plated mini plug.

Accessories included

Belt clip:	Allows the user to wear the unit on a belt.
Lanyard:	Allows the user to wear around the neck.
TV listening extension cord:	extends the microphone to 12 ft.
Options:	Unit comes packaged with one of the Williams Sound options. Mini earphone, single (EAR 013) Dual mini earbud (EAR 014) Wide range earphone; single (EAR 008) Lightweight headphone (HED 021) Wide range headphone (HED 026) Induction neck loop (NKL 001)

Approvals:	CE
Warranty:	5 years, parts and labor (90 days on accessories)

Electrical Specifications (1k Hz ref.)


Power output:	50 mW (max) into 16 ohms
AGC:	Limits maximum output level
Distortion:	2% THD (max)

Frequency response


Tone at high position: 11dB boost at 5kHz, 8dB cut at 400 Hz.

Tone at mid position: 0dB boost at 5kHz, 4dB cut at 400Hz.

Tone at low position: 3dB cut at 5kHz, 4dB boost at 400 Hz.

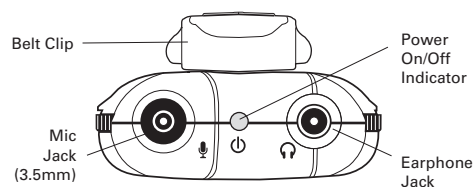

Pocketalker Top

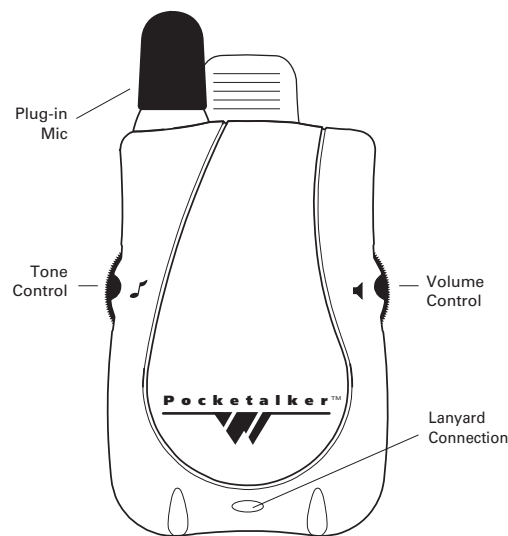

Pocketalker Front

*90-day warranty on accessories.

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

POCKETALKER® ULTRA Personal Amplifier, Model PKT D1

Acoustic Specifications: Typical values (ANSI S3.22-1987)

Lightweight headphone, HED 021: (with 6cc coupler)

Test	Tone High	Tone Mid	Tone Low
SSPL90	121.4 dB	120.6 dB	120.1 dB
HF Ave (SSPL90)	119.3 dB	118.9 dB	118.4 dB
HF Ave full on gain (50 dB)	39.3 dB	36.5 dB	32.3 dB
Reftest gain	39.5 dB	36.7 dB	32.3 dB

Wide range headphone, HED 026: (with 6cc coupler)

Test	Tone High	Tone Mid	Tone Low
SSPL90	121.8 dB	122.0 dB	122.5 dB
HF Ave (SSPL90)	120.9 dB	120.5 dB	119.3 dB
HF Ave full on gain (50 dB)	41.9 dB	38.9 dB	33.9 dB
Ref test gain	42.2 dB	39.1 dB	34.0 dB

Wide range earphone, EAR 008: (with 6cc coupler)

Test	Tone High	Tone Mid	Tone Low
SSPL90	120.9 dB	120.7 dB	120.9 dB
HF Ave (SSPL90)	116.7 dB	116.5 dB	116.2 dB
HF Ave full on gain (50 dB)	37.3 dB	34.8 dB	30.8 dB
Ref test gain	37.6 dB	35.0 dB	30.9 dB

Mini earphone single, EAR 013: (with 2cc coupler)

Test	Tone High	Tone Mid	Tone Low
SSPL90	123.5 dB	123.5 dB	123.5 dB
HF Ave (SSPL90)	117.8 dB	117.7 dB	117.5 dB
HF Ave full on gain (50 dB)	38.6 dB	36.5 dB	32.7 dB
Ref test gain	39.4 dB	37.1 dB	33.1 dB

Dual mini earphone, EAR 014: (with 2cc coupler)

Test	Tone High	Tone Mid	Tone Low
SSPL90	120.8 dB	120.9 dB	121.1 dB
HF Ave (SSPL90)	109.1 dB	109.0 dB	108.9 dB
HF Ave full on gain (50 dB)	30.3 dB	28.4 dB	25.3 dB
Ref test gain	31.0 dB	28.7 dB	24.8 dB

Note: The Pocketalker® Ultra is not sold, advertised or intended for use as a personal hearing aid. Williams Sound recommends that any individual experiencing hearing loss be examined by a physician/audiologist to determine the cause before using this device.

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

POCKETALKER® ULTRA Personal Amplifier, Model PKT D1

Bid Specs:

The Williams Sound Corp. Pocketalker® Ultra, model PKT D1 shall be housed in an ABS plastic impact resistant plastic silver case with a removable battery door. The dimensions shall be 90mm X 55mm X 20mm. The Pocketalker® Ultra shall operate on 2 X AAA batteries and operate for 100 hours continually with disposable alkaline batteries. The Pocketalker® Ultra shall have a maximum 130dB output with EAR 013 earphone and have a non-adjustable AGC (Limiter) and external rotary adjust tone control. The Pocketalker® Ultra shall have a combination ON/OFF rotary volume control and a red power LED that will flash to signal when the battery level is low. The Pocketalker® Ultra shall have 3.5mm mono microphone and earphone jacks. The Pocketalker® Ultra shall have a removable belt clip for hands free operation and lanyard connection at the bottom of the case. Pocketalker® Ultra shall have a five-year warranty excluding earphones, headphones, batteries, chargers, belt clip and other accessories. The Pocketalker® Ultra shall be the Williams Sound Corp. model PKT D1.

Contact:

United States and Mexico

Williams Sound Corp.
10321 W. 70th Street
Eden Prairie, MN 55344-3446
Ph: 800-328-6190 / 952-943-2252 / FAX: 952-943-2174
Web: www.williamssound.com
Email: info@williamssound.com

Canada

Thorvin Electronics
2861 Sherwood Heights Dr. Units 36-37
Oakville, ON L6J-7K1 Canada
Ph: 800-323-6634 / 905-829-3040 / FAX: 905-829-4196
Web: www.thorvinelectronics.com

South America

DPtech
SIA Trecho 3/4 Lote 335 2°. Andar
71200-030 Brasília, DF
BRAZIL
Ph: (5561) 361-1384
Fax: (5561) 361-0948
Web: www.dpotech.com.br
Email: ws@dpotech.com.br

Europe and Asia

International Sales Department
Williams Sound Corp.
10321 W. 70th Street
Eden Prairie, MN 55344 USA
Phone: +1 651 493 2578 or +1 952 943 2252
Fax: +1 952 943 2174
Email: doreeni@williamssound.com
Web: www.williamssound.com